


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-17-014522	26APR2018	AP	DG

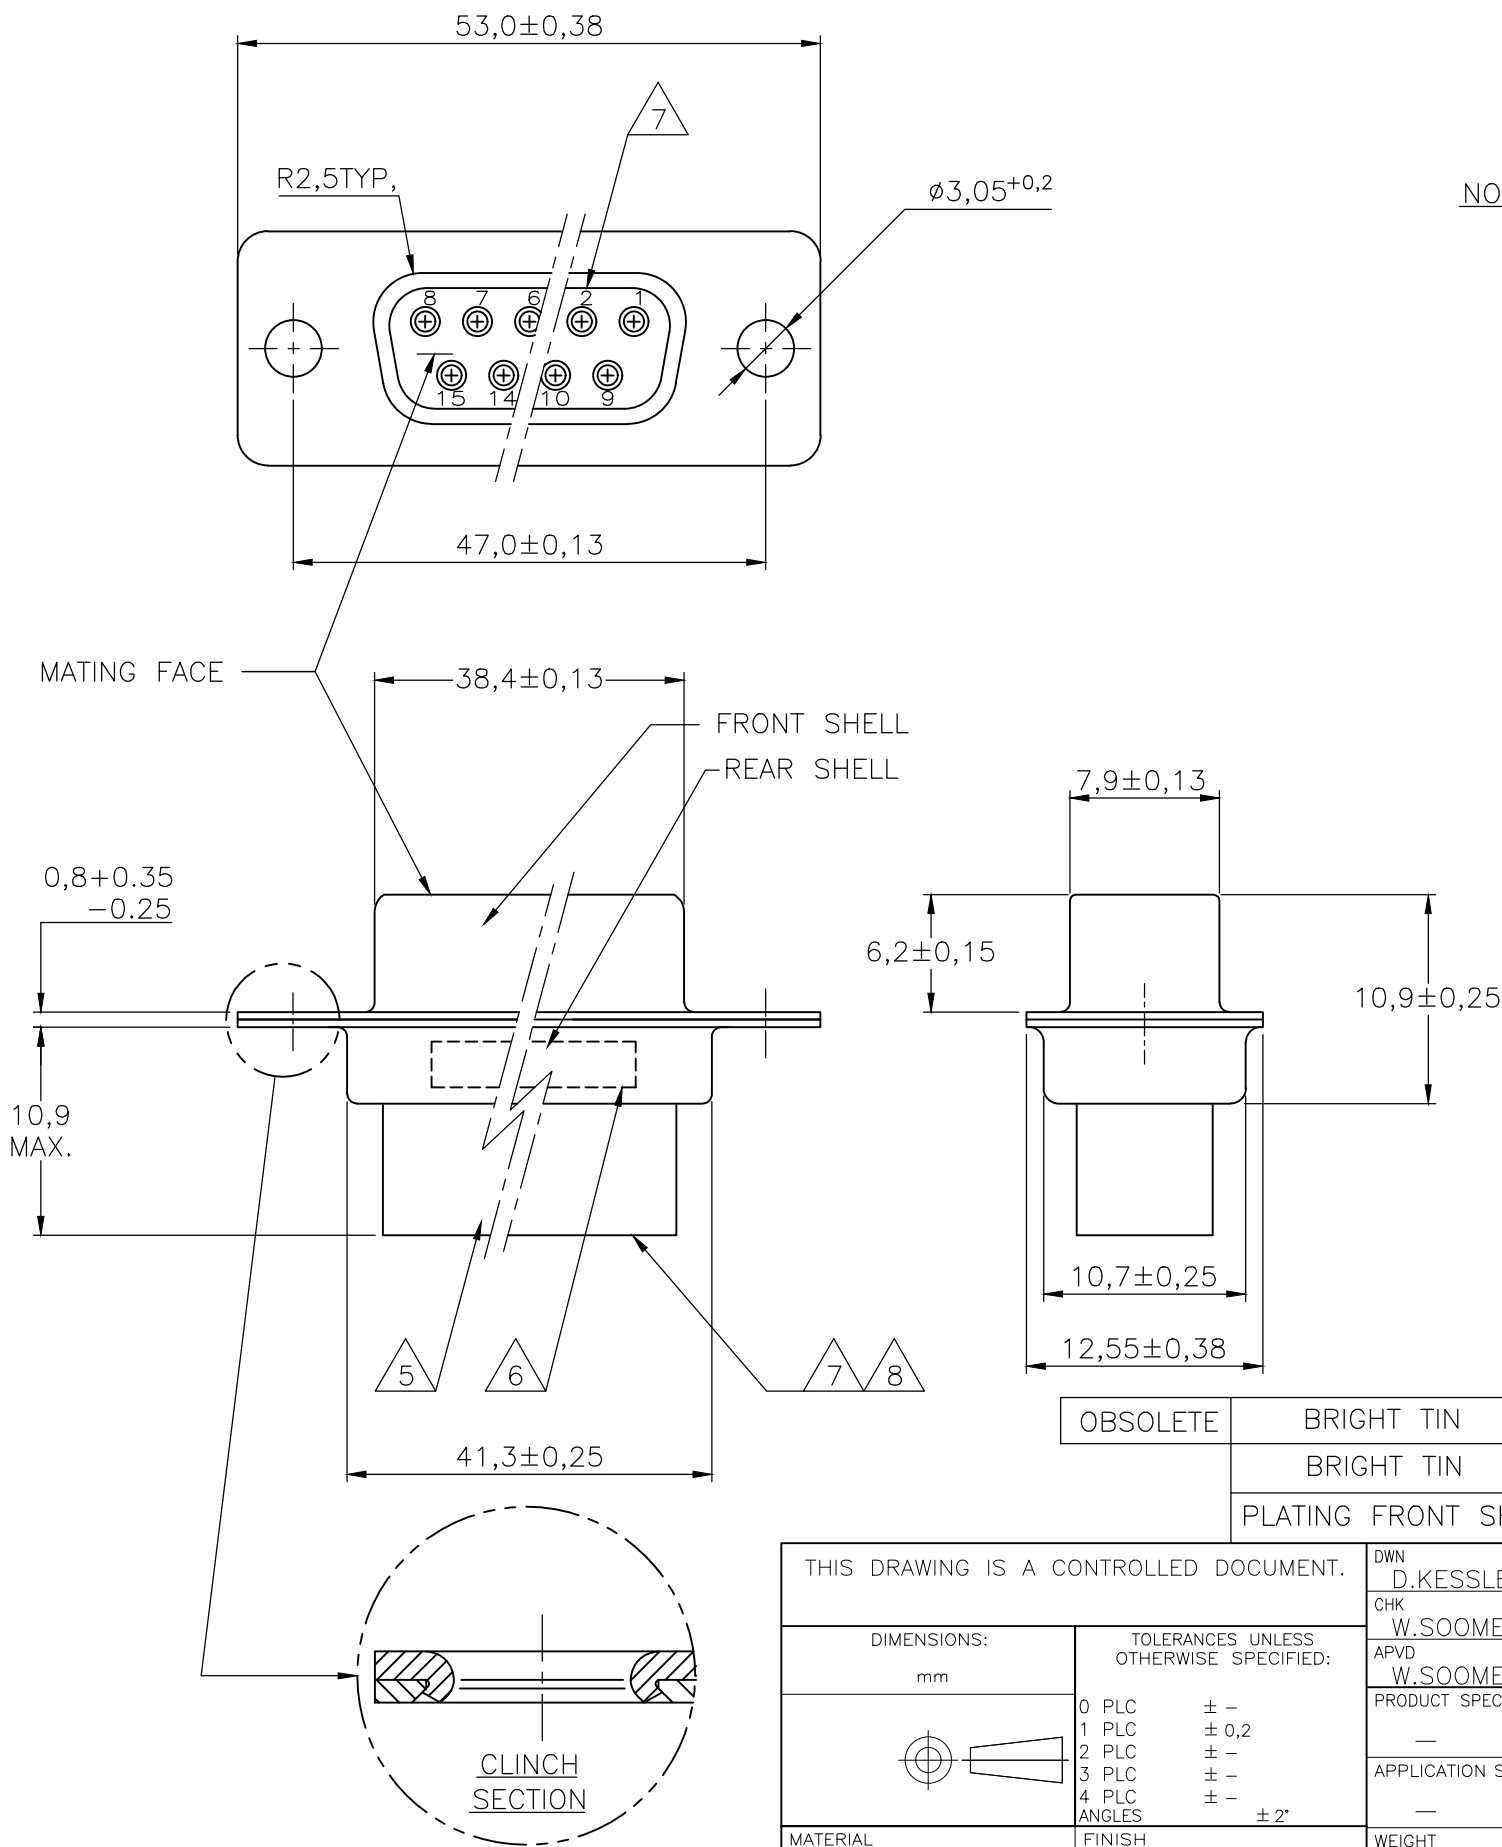

- NOTES:
- 1 THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
 - 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
 - 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
 - 4 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONTACTS
91067-3 INSERTION/REMOVAL
726363-1 INSERTION ONLY
24-20AWG CONTACTS
726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY
- 5 INSERTS: GLASSFILLED SELF-EXTINGUISHING PBT, COLOR BLACK.
- 6 TE, PARTNUMBER AND DATE CODE; INK STAMPED.
- 7 RAISED CAVITY IDENTIFICATION 0,8 HIGH.
- 8 RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164533-9.

OBSOLETE	BRIGHT TIN	BRIGHT TIN	STEEL	164533-9	8
	BRIGHT TIN	BRIGHT TIN	STEEL	164533-4	
	PLATING FRONT SHELL	PLATING REAR SHELL	MATERIAL SHELLS	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
-

FINISH
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0,2
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± 2°

DWN
D.KESSLER

CHK
W.SOOMERS

APVD
W.SOOMERS

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT

11FEB99

NAME

SIZE
A3

CAGE CODE
-

DRAWING NO
C- 164533

RESTRICTED TO
-

TE Connectivity Ltd.

25 POS HDP-20 RECEPTACLE
CONNECTOR SIZE 3

SCALE
NTS

SHEET
1 OF 1

REV
P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[164533-4](#)