




PART NUMBER	Plating
8656450067LF	0.4μ Au
8656450067	0.4μ Au

NOTES:

- 1-Material: phosphor bronze, thickness 0.20
- 2-Finish on contact area: SEE TABLE
finish on termination: bright tin lead over nickel
- 3-Wire range: 20 to 28 AWG
- 4-Max outer dia of wire insulator:
-1.73 mm for contact #20-24
-1.02 mm for contact #24-28
- 5-Current carrying capacity per contact:
5 Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
2 Amps max when crimped to #26 AWG
1 A Amps max when crimped to #28 AWG
- 6-After 5 insertions into connector, contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 20 AWG, the insulation support crimped height must be 1.78 mm max to ensure a proper insertion into housing
- 6-Packaging: Reel

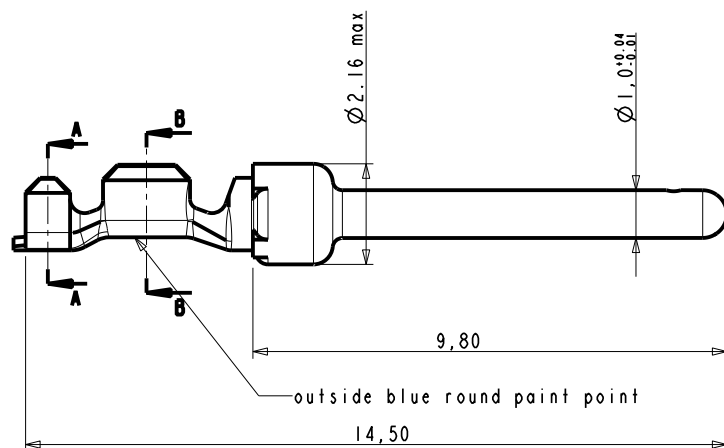

SECTION A-A



SECTION B-B

CROSS SECTIONS
FOR CT #24-28

NOTE : ROHS INFORMATION
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

rev	ecn no	dr	date
C	LS08-196	MPE	27/11/2006
D	LS08-0127	MPE	13/05/2008
E	LS08-0216	MPE	26/11/2008
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	-	18/04/03	ANGULAR		0.X ±0.3		size A3		Scale 5/1		
Eng	-	-	LINEAR		0.XX ±0.1						
Chr	-	-	0° ±2°		0.XXX ±0.05		ECN		LS08-0216		
Appr	-	-	Product family					Spec ref			
			title CRIMP PIN				dwg no C01-8656-0417			Rev E	
			#Wire 24-28 Ø1.02								
			catalog no							sheet 1 of 1	

REV F - 2006-04-17

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[8656450067LF](#)