
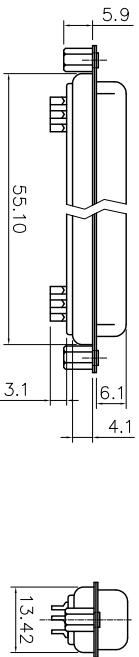
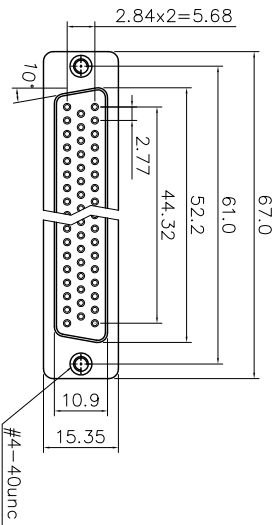


Customer drawing

Positions	A	B	D	E	F
9	30.81	24.99	16.33	11.08	19.20
15	39.20	33.30	24.70	19.39	27.70
25	53.05	47.04	38.40	33.24	41.10
37	69.40	63.50	54.80	49.86	57.30

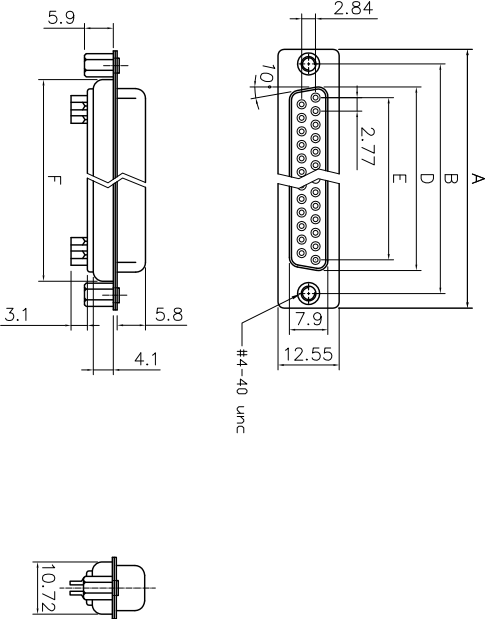

50 Positions


REVISONS			
S/N	ECN	DESCRIPTION	DATE
1	HK--	First Release Drawing	01/09/13
2	HK--	Update the Drawing	04/29/14

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" Tin over 50u" nickel over 50u" min Copper
BODY : Glass-Filled Thermoplastic PBT, UL94V-0
CONTACTS : Copper Alloy
REAR NUT: Brass, Nickel Plated
ELECTRICAL : Voltage rating 250 VAC/RMS 60HZ
Current Rating 3 AMP
Withstanding Voltage 1000 VAC/RMS 60HZ for 1 minute
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 77 SD X H X S

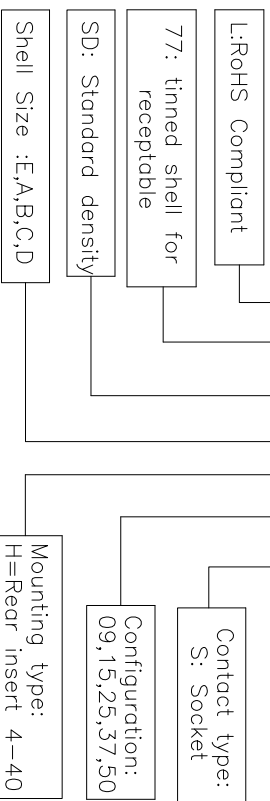

UNLESS OTHERWISE SPECIFIED			
TOLERANCES	U.S.	APPROVAL	DATE
X +/-	0.38	DRAWN	04/29/14
.XX +/-	0.25	CHECKED	04/29/14
FRACTIONS +/-	0.13		
ANGLES x +/-	30°		
FOR MATERIALS AND FINISHES	SEE NOTES		
REMOVE SHARP EDGES			
DIMENSIONS	INCHES	ANGLE OF PROTECTION	
U.S.	MM		
APPROVAL			
SIZE	DRAWING NO.		REV.
A4	L77SDXHXSS		2
SCALE	NONE		SHEET 1 OF 1

Amphenol
Amphenol East Asia Limited
Stamped and formed contact,SD series