



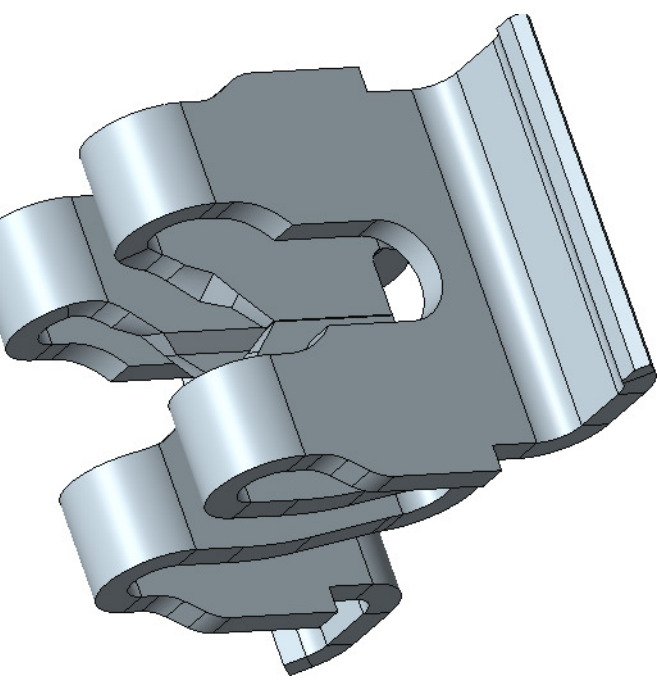


SCALE 15:1

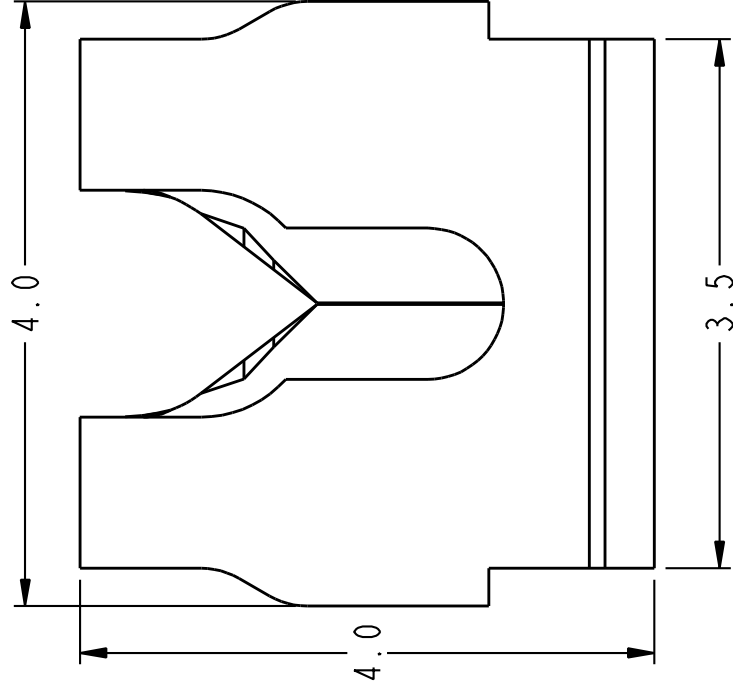

SCALE 20:1

-001TRLF	1,900	WITHOUT PICK & PLACE CAP, IN TAPE & REEL	
-101TRLF	1,900	WITH PICK & PLACE CAP, IN TAPE & REEL	
-101ILF	1	SINGULATED	
-001ILF	7,500	ON REEL	
PART NUMBER	QUANTITY	DESCRIPTION	NOTES


spec ref		-		dr		James Sabo		2014/03/18		projection		mm		size		A3		scale	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Johann Juillet		2017/11/21						ecn no		ELX-F-27377-1		10:1	
ISO 406		ISO 1101		chr		Johann Juillet		2017/11/21											
				appr		Aymeric Souley		2017/11/21		product family		-		rel level		Released			
surface				linear		0.X		±0.3		0		mm		TERMINAL, GRIPLET,™ SMT		10127850C		rev	
						0.XX		±0.05		+									
						0.XXX		±0.025		+				20 - 30AWG				C	
ISO 1302		angular		0°		±2°				cat. no.		-		Product - Customer Drw				sheet 1 of 3	
						www.fci.com													
						Amphenol FCI													

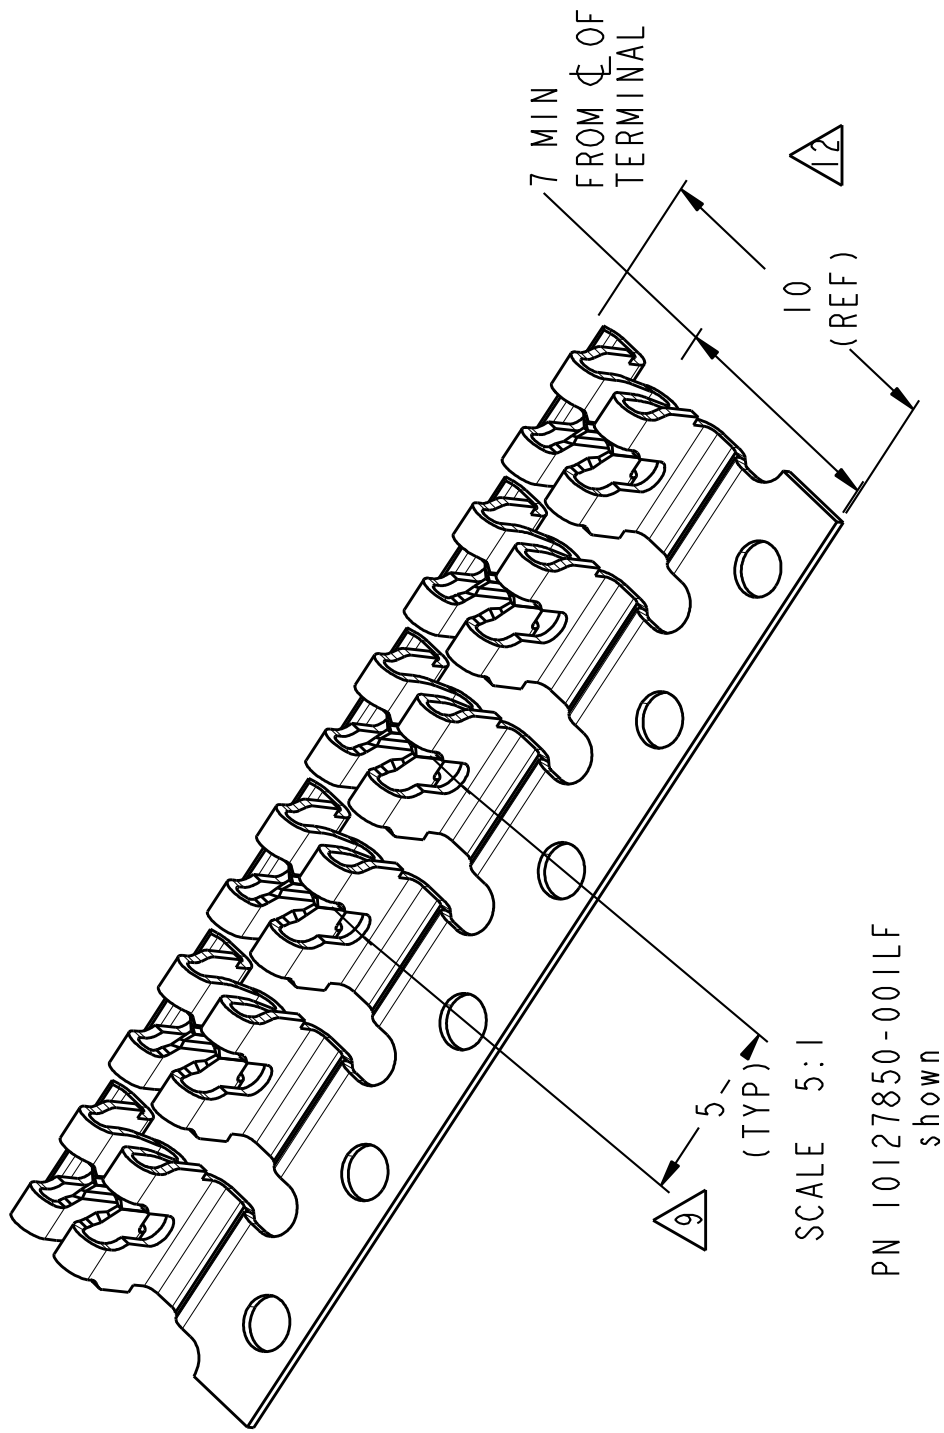


1. CONNECTOR MATERIAL: COPPER ALLOY
2. PLATING: TIN OVER NICKEL.
3. PRODUCT SPECIFICATION: GS-12-1234.
4. PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
5. PRODUCT MARKING: N/A
6. MINIMUM CENTERLINE SPACING BETWEEN ADJACENT TERMINALS IS 5MM.
7. WIRE INSERTION TOOL REQUIRES KEEP-OUT ZONE AS SHOWN.
8. LEAD-FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

AVAILABLE WITH AND WITHOUT PICK & PLACE CAPS
ON 13 INCH DIAMETER REEL,
SEE TABLE FOR QUANTITY PER REEL.
TAPE & REEL SPECIFICATION: EIA-481B AND
EFC1 PACKAGING SPECIFICATION GS-14-2541.

RECOMMENDED NOMINAL SOLDER
STENCIL THICKNESS:
0.127MM (0.005 INCH)

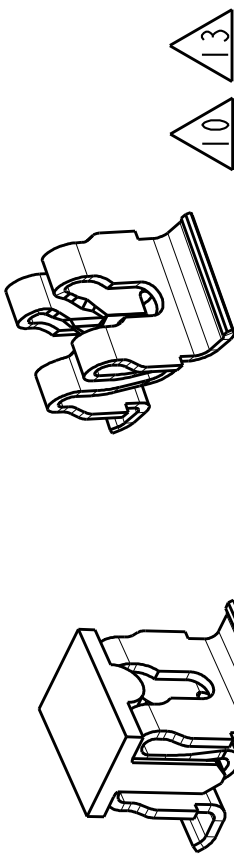

SCALE 5:1
PN 10127850-101TRLF
and
PN 10127850-001TRLF
shown

spec ref		-	dr	James Sabo	2014/03/18	projection			mm	size		scale
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Johann Juliet	2017/11/21						A3	10:1
ISO 406			chr	Johann Juliet	2017/11/21							
ISO 1101			appr	Aymeric Soudy	2017/11/21							
surface			0.X		±0.3	product family		-	rel level	Released		
			linear		0.XX							±0.05
			angular		0.XXX							±0.025
ISO 1302		0°	±2°			TERMINAL, GRIPLET, SMT		10127850C		rev		
						20-30AWG				C		
				www.fci.com		cat. no.		Product - Customer Drw		sheet 2 of 3		

