

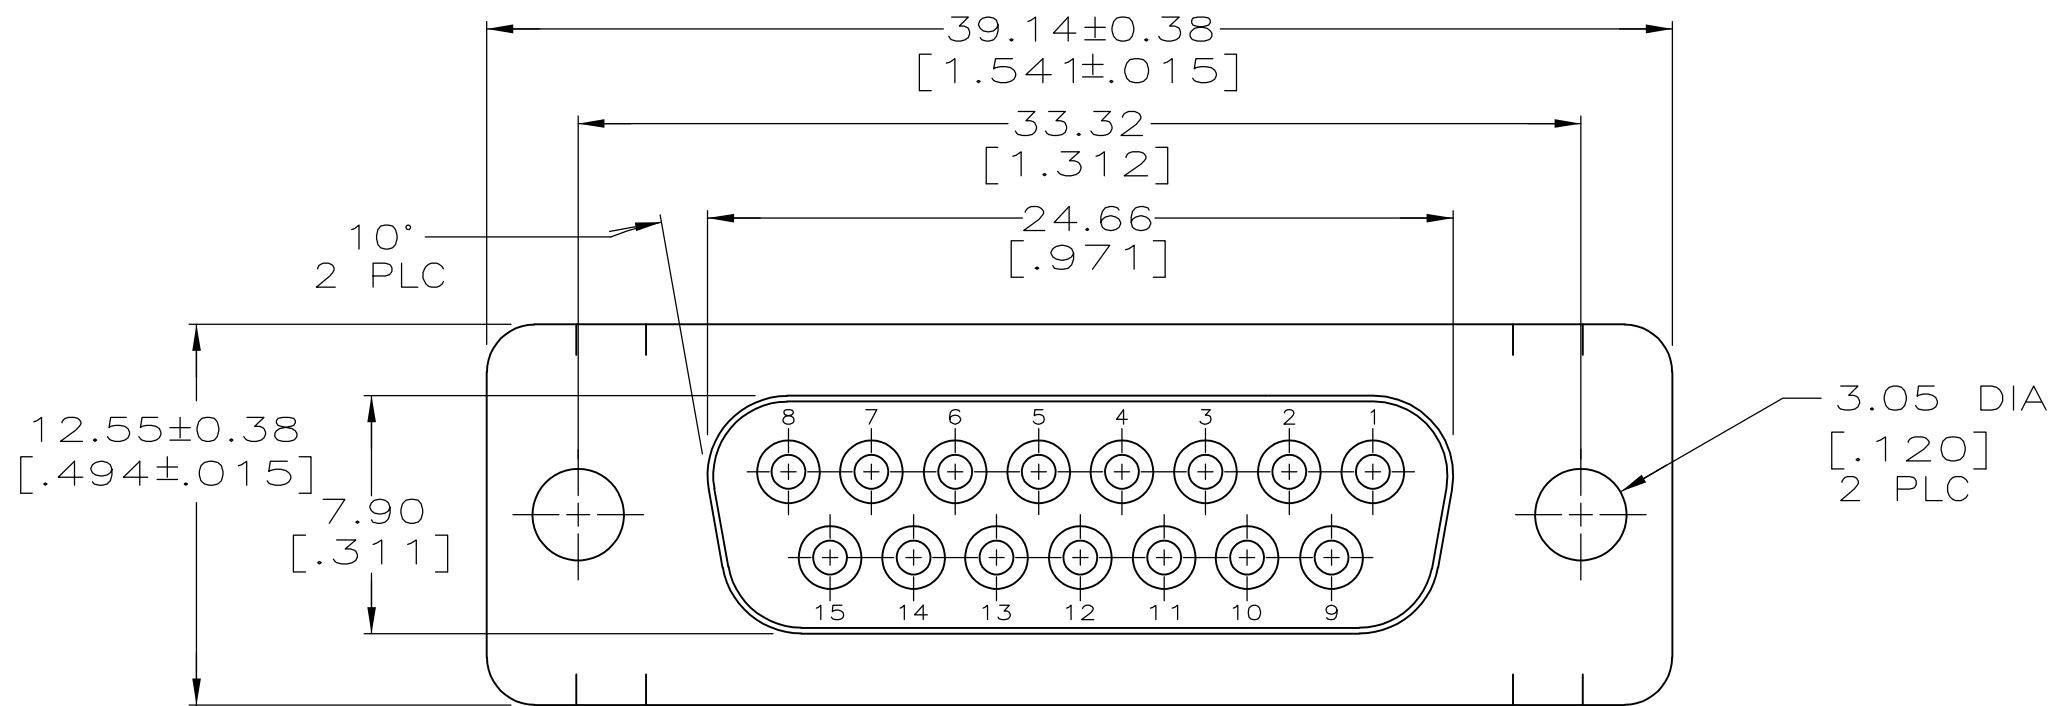


D

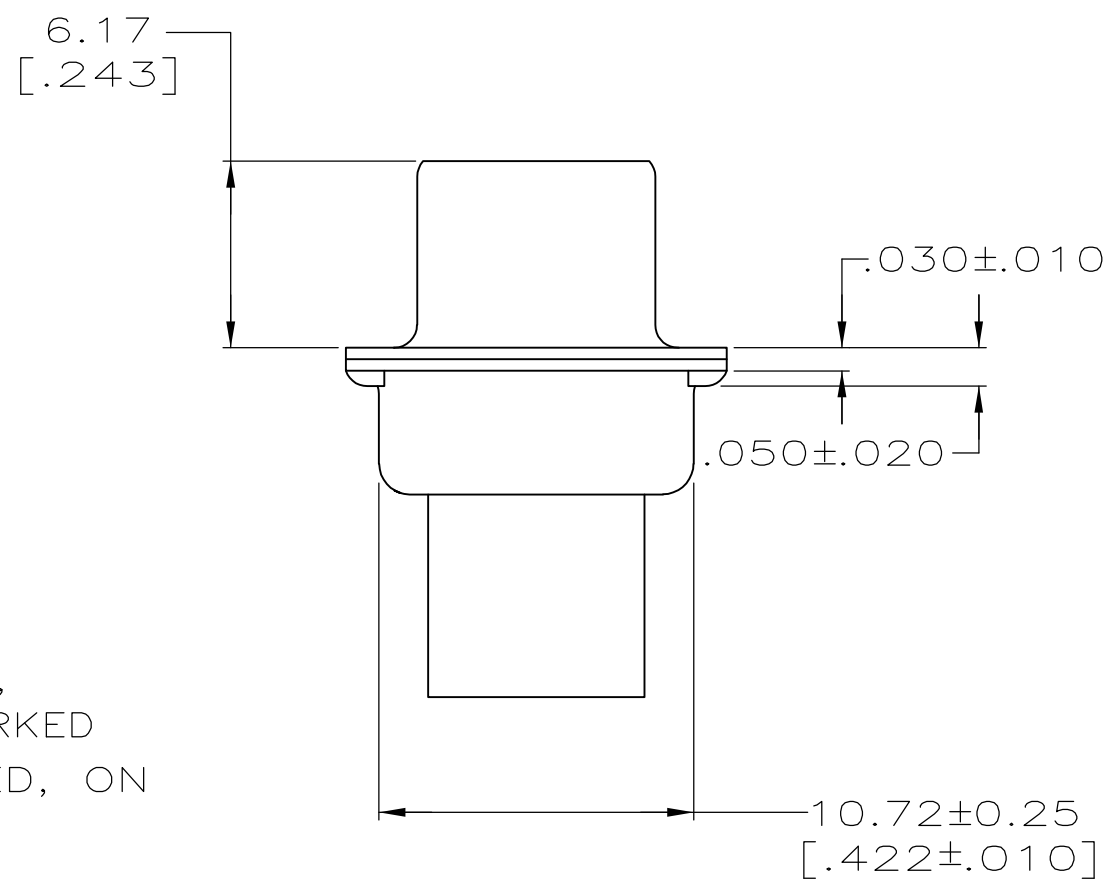

- 1 CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2 CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- 3 MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
- 4 SHELLS: STEEL PER ASTM A109.
- 5 ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- 6 TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.
- 7 ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

C

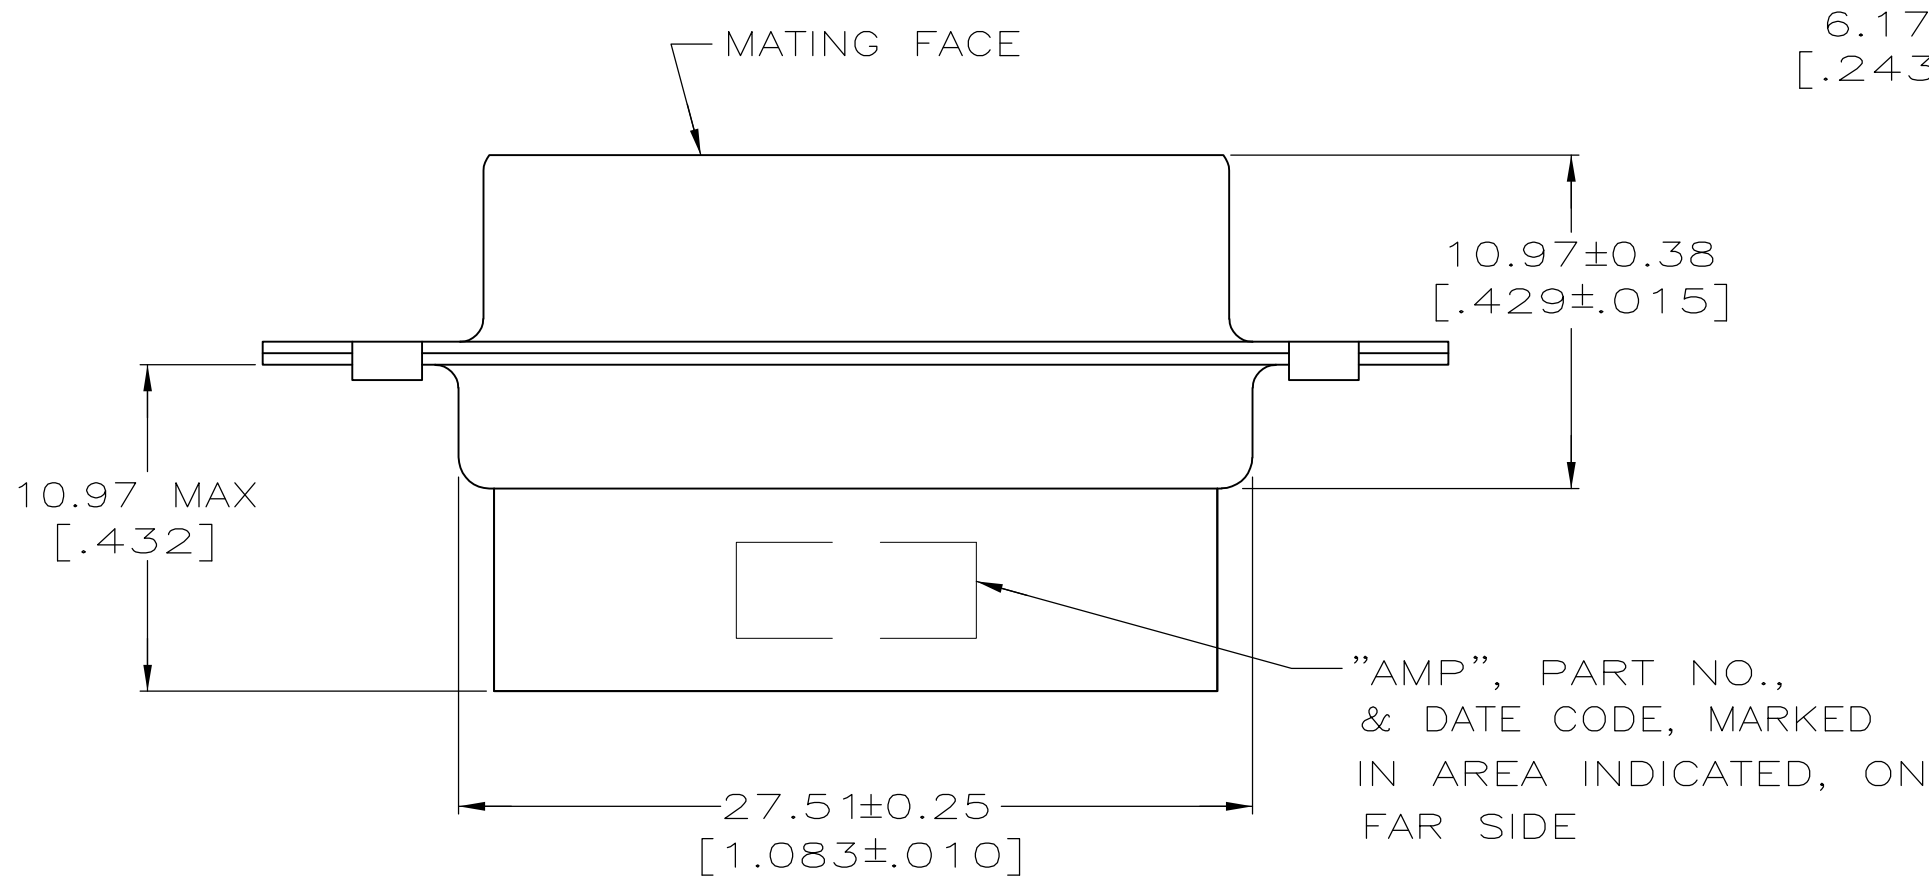

B

SUPERSEDED BY 205205-1	STANDARD	7	205205-7
	SMALL PACK	5	205205-5
	STANDARD	6	205205-2
	STANDARD	5	205205-1
OBSOLETE	PACKAGING TYPE	SHELL FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 7-19-85	TE Connectivity		
DIMENSIONS: INCHES		CHK J. GERACE 7-29-85			
		APVD V. KUMAR 7-31-85	NAME RCPT CONNECTOR, SIZE 2, 15 POSN, AMPLIMITE , HDP TM		
		PRODUCT SPEC			
MATERIAL SEE NOTES		FINISH SHELLS: SEE TABLE	APPLICATION SPEC	SIZE A2	
		WEIGHT -	CAGE CODE 00779		DRAWING NO C=205205
		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
				REV K	

205205

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[205205-2](#)