
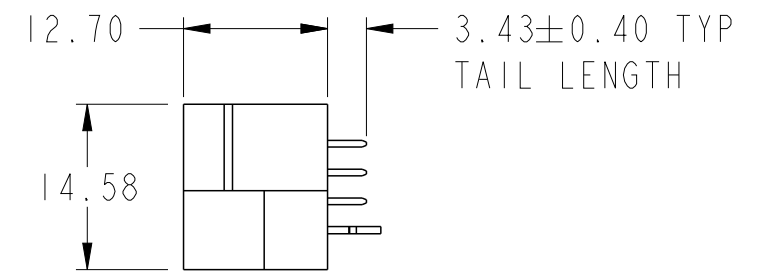
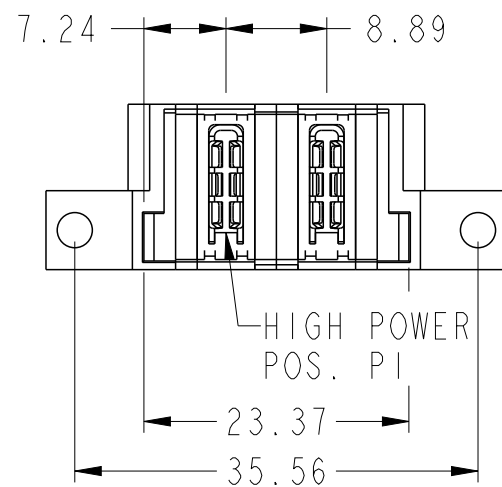
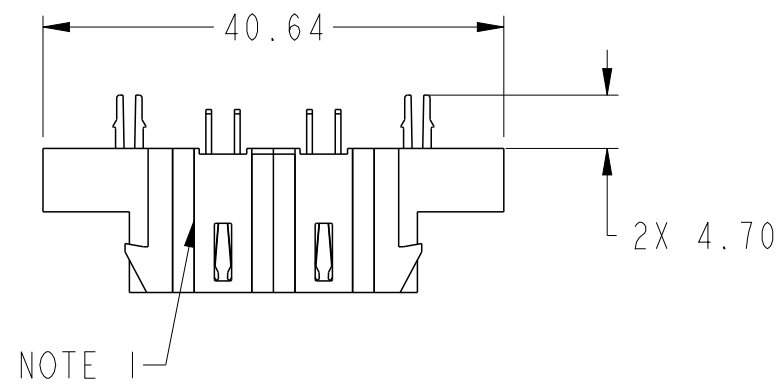


PART NUMBER SEE SHEET 2

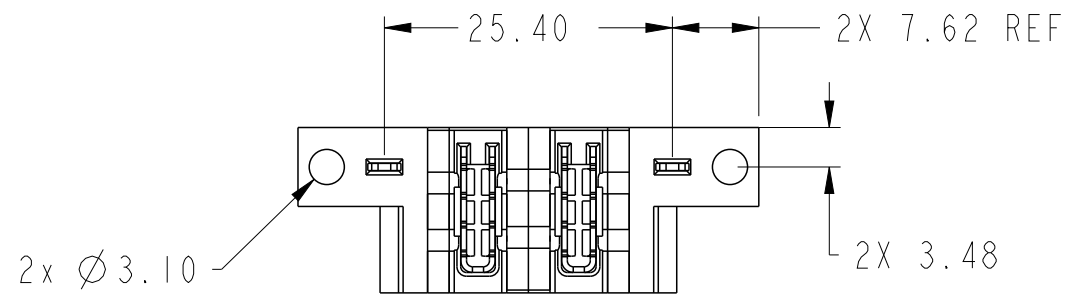

spec ref *				dr		Zhan Rainbow	2017/07/27	projection	MM	size	A3	scale	3:2
tolerance std				eng		Zhan Rainbow	2017/08/25			ecn no -			
ISO 406				chr		Kaka Zhang	2017/08/25			rel level Released			
ISO 1101				appr		Pei-Ming Zheng	2017/08/25			product family PwrBlade+			
surface ISO 1302 ✓		linear		0.X	±0.5	Amphenol FCI	title 2ACP				dwg no 10106266-2000402		rev A
				0.XX	±0.25								
				0.XXX	±0.10								
		angular		0°	±2°		cat. no.		Product - Customer Drw				

A

B

C


D

A


B

C

D

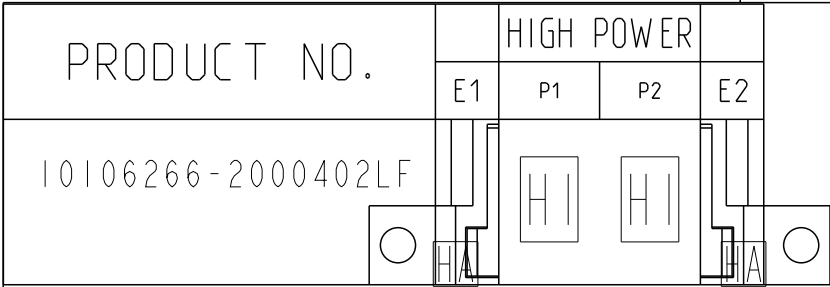

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT
HA	METAL HOLD DOWN

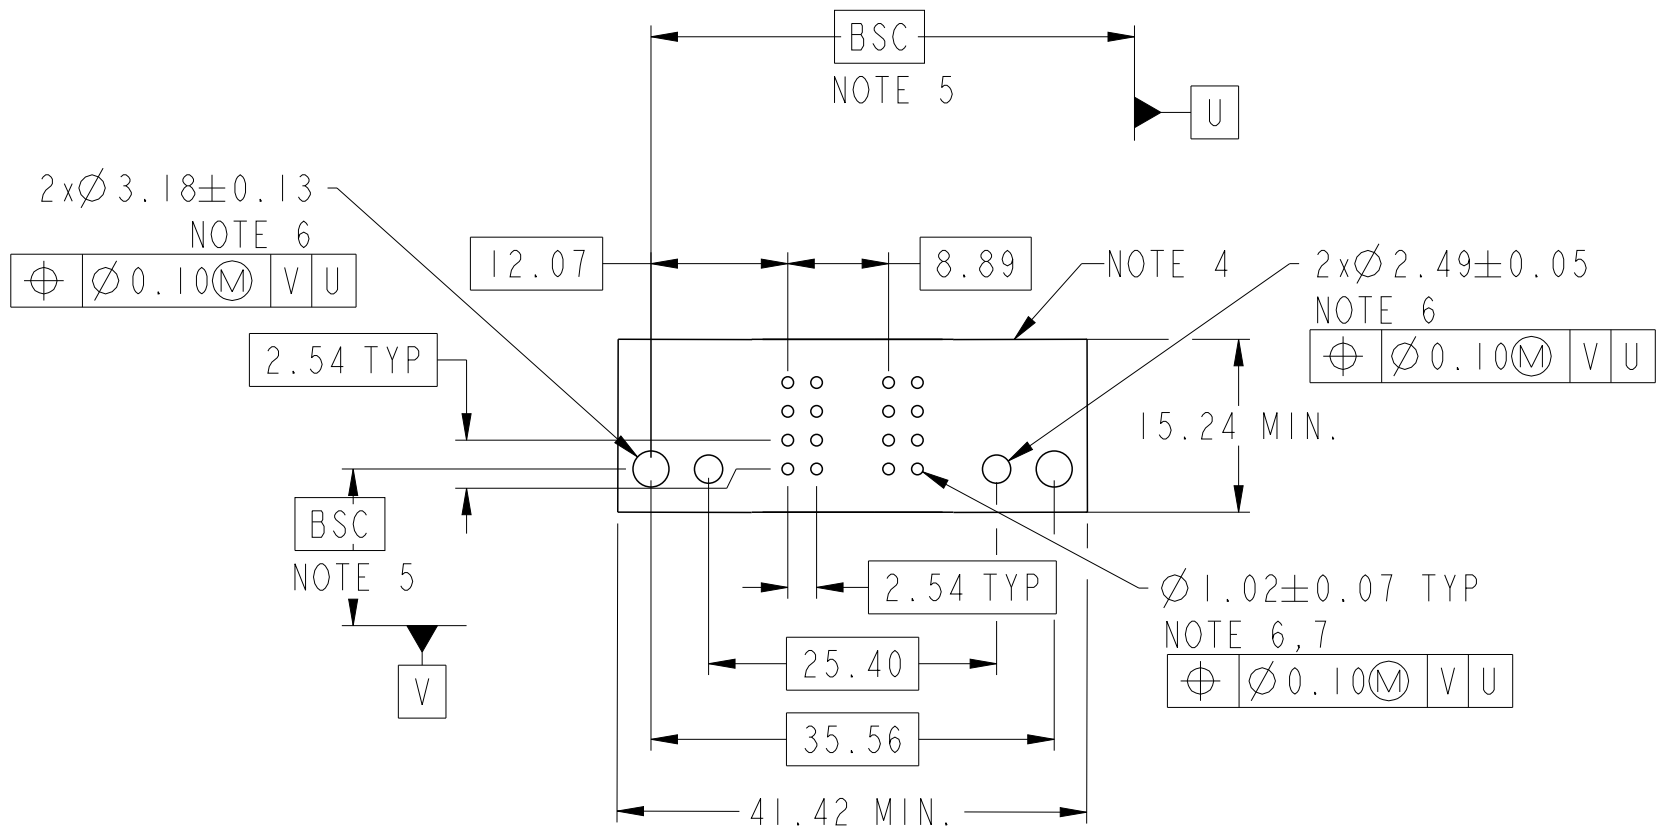

spec ref		*		dr		Zhan Rainbow	2017/07/27	projection		MM		size		A3	scale		3:2						
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Zhan Rainbow	2017/08/25					ecn no						-					
ISO 406				chr		Kaka Zhang	2017/08/25					rel level						Released					
ISO 1101				appr		Pei-Ming Zheng	2017/08/25											product family					
surface		linear		0.X		±0.5		Amphenol FCI		title		2ACP		dwg no		10106266-2000402		rev		A			
																				0.XX		±0.25	
																				0.XXX		±0.10	
ISO 1302		angular		0°		±2°		cat. no.		Product - Customer Drw						sheet 2 of 3							

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10)PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref		*		dr		Zhan Rainbow	2017/07/27	projection		MM		size		A3	scale		3:2							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Zhan Rainbow	2017/08/25					ecn no		-										
ISO 406				chr		Kaka Zhang	2017/08/25																	
ISO 1101				appr		Pei-Ming Zheng	2017/08/25	product family		PwrBlade+		rel level		Released										
surface		linear		0.X		±0.5		Amphenol FCi		title		2ACP		dwg no		10106266-2000402		rev		A				
																					0.XX		±0.25	
																					0.XXX		±0.10	
ISO 1302		angular		0°		±2°				cat. no.		Product - Customer Drw		sheet 3 of 3										