



MATERIAL

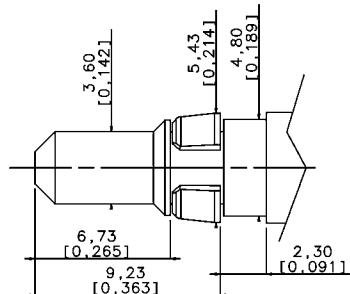


PIN CONTACT
SOCKET CONTACT
RETAINING CLIP
SURFACE PLATING

Cu Zn
Cu Ni
Thermoplastic
Au = 0.5 um





HIGH POWER PLUG



CRIMP VERSION VERSION A SERTIR



	CURRENT	PUISSANCE		Ø A	Ø B		
4W540 30R	L17DM53745-208	10A	1.8	2.55	L17DM53744-207	4W550 30R	
4W540 20R	L17DM53745-207	20A	2.8	3.7	L17DM53744-206	4W052 16P	
4W042 36P	L17DM53745-204	30A	3.76	4.7	L17DM53744-204	4W052 36P	
4W540 00R	L17DM53745-201	40A	4.8	5.6	L17DM53744-201	4W052 06P	

HIGH POWER JACK





SOLDER VERSION VERSION A SOUDER

	CURRENT	PUISSANCE		Ø A	Ø B		
4W040 30C	L17DM53745-8	10A	1.8	2.55	L17DM53744-7	4W050 30C	
4W040 20C	L17DM53745-7	20A	2.8	3.7	L17DM53744-6	4W050 20C	
4W040 00C	L17DM53745-1	40A	4.8	5.6	L17DM53744-1	4W050 00C	



CRIMP SHORT VERSION VERSION COURTE A SERTIR

	CURRENT	PUISSANCE		Ø A	Ø B		
4W042 29R	L17DM53745-218	10A	1.8	2.55	L17DM53744-217	4W050 29R	
4W042 19R	L17DM53745-217	20A	2.8	3.7	L17DM53744-216	NC	
NC	L17DM53745-211	40A	4.8	5.6	L17DM53744-211	NC	

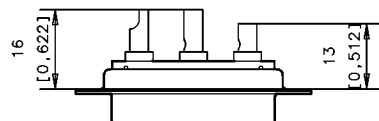

				TOL. GEN.			
				VOLUME PIECE			
				SURFACE PIECE			
C	conform to RoHS	Vallo	23/12	PROTECTION			
B	DM 05 23 010	QUERE	04/10	TRAITEMENT		ECH.	ENS.
A	RETAINING CLIP thermoplastic	QUERE	19/10	MATIERE		N SERIE	
IND. MODIFICATIONS		EXEC.	DATE	Approb			
DATE DU TIRAGE		DESIGNATION					

HIGH POWER CONTACTS 0,5 Au

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[L17DM53744-201](#) [L17DM53744-6](#) [L17DM53744-7](#) [L17DM53744207](#)